

25.5MY ISUZU D-MAX SPECIFICATIONS

Engine	3.0L	2.2L
Series	Isuzu 4JJ3-TCX	RZ4F-TC
Description	3.0 litre turbo-diesel, in-line 4-cylinder, DOHC, 16-valve with Diesel Particulate Diffuser (DPD)	2.2 litre turbo diesel, in-line 4-cylinder, DOHC, 16-valve with Diesel Particulate Diffuser (DPD)
Maximum torque	450Nm @ 1600→2600 rpm	400Nm @ 1600→2400 rpm
Maximum power	140kW @ 3600 rpm	120kW @ 3600 rpm
Bore x stroke	95.4mm x 104.9mm	83mm x 100mm
Displacement	2999cc	2164cc
Compression ratio	16.3 : 1	15.9 : 1
Cylinder head	Isuzu-patent special aluminium alloy	Isuzu-patent special aluminium alloy
Valve gear	Chain-driven dual overhead camshafts, roller rockers, 4 valves/cylinder	Chain-driven dual overhead camshafts, roller rockers, 4 valves/cylinder
Induction	Electronic high pressure common rail direct fuel injection with VSS (Variable Swirl System) and intercooled electric control VGS (Variable Geometry System) turbocharger	Electronic high pressure common rail direct fuel injection and intercooled electric control VGS (Variable Geometry System) turbocharger
Cylinder block	Cast iron upper with induction-hardened cylinder bores, cast alloy lower	Cast iron upper with induction-hardened cylinder bores, cast alloy lower
Emission level	Euro 5	Euro 5
Alternator	120 amp with Intelligent Battery Sensor (IBS)	120 amp with Intelligent Battery Sensor (IBS)

Transmissions

Automatic	Aisin AWR6B45 II 6-speed with sequential shift and fuel-saving lock-up torque converter Aisin L-B500 8-speed with sequential shift and fuel-saving lock-up torque converter ► Uphill/Downhill Transmission Control: holds gear in varied-gradient ascents, selects gear on steep descents to hold speed with engine braking		
Ratios:		3.0L Engine 6-speed Automatic	2.2L Engine 8-speed Automatic
	1st	3.600	4.903
	2nd	2.090	3.120
	3rd	1.488	2.166
	4th	1.000	1.597
	5th	0.687	1.312
	6th	0.580	1.000
	7th	-	0.776
	8th	-	0.651
Final drive	Reverse	3.732	4.050
	4x2	3.727	3.583
	4x4	3.727	3.583
	Snorkelled diff breathers to increase fording depth and reduce mud blockage		
Transfer gearing	4x4 low-range	2.482	2.482
	4x4 high-range	1.000	1.000
4x4 system	“Terrain Command” control with ‘shift on the fly’ 2-high↔4-high selection at up to 100km/h, 4-low with rear differential lock		
Drivetrain system	TCS (Traction Control System) on all model variants		

Steering

Electric power steering with speed-sensing steering feel (light at low speed, heavy at high speed); tilt and telescopic adjustable steering wheel
Engine-speed-sensitive variable capacity Electric power system; 3.84 turns lock-to-lock via tilt-adjustable steering wheel

Chassis

Separate, full-length heavy-duty chassis with 8 cross members on all models
Front suspension Independent, high-ride, coil springs, gas shock absorbers, upper and lower wishbones, stabiliser bar
Rear suspension All Cab Chassis models: Heavy Duty alloy-steel overslung long-span semi-elliptic leaf springs; gas shock absorbers 4x2 and 4x4 models: Alloy-steel overslung long-span semi-elliptic leaf springs; gas shock absorbers

Axles

Front Independent 4x4: fully floating with outer CV, inner double offset joints and equal length driveshafts. Rating: 1450kg
Rear Rigid semi-floating banjo with hypoid final drive and dual tapered needle roller bearings. Rating: 1910kg

Brakes

Anti-lock Brake System (ABS) with Electronic Brakeforce Distribution (EBD), Electronic Stability Control (ESC), Emergency Brake Assist (EBA), Traction Control System (TCS), Rollover Mitigation, Hill Start Assist (HSA), Hill Descent Control (HDC) and Trailer Sway Control (TSC)
320mm dia. ventilated front discs with 2-piston calipers, 295mm rear drums
Power-assisted via 10” servo unit; central pull up park brake

Wheels and Tyres

SX	17” x 7” drilled Silver-Finish Steel; 255 / 65 R17 All-Terrain
X-RIDER	17” x 7” alloy; 255 / 65 R17 All-Terrain
LS-U and LS-U+	18” x 7.5” alloy; 265 / 60 R18 Highway-Terrain
X-TERRAIN	18” x 7.5” Dark Grey Alloy; 265 / 60 R18 Highway-Terrain
All Models	Full size steel spare wheel

Service Plus

Flat Price Servicing [†]	As an owner you may be able to access our Flat Price Servicing Program. The FPS Program covers the first 5 Scheduled Services in line with the Scheduled Service Intervals.
Warranty [^]	For the ultimate peace of mind, the Isuzu D-MAX comes standard with a comprehensive, bumper-to-bumper 6 years/150,000km warranty.
Roadside Assistance ^{<}	Enjoy up to 7 years Roadside Assistance when you complete your scheduled services at a Participating Isuzu UTE Dealer.

The FPS Program covers the first 5 Scheduled Services in line with the Scheduled Service Intervals.

[†]The Flat Price Servicing Program (“FPS Program”) applies to FPS Eligible Vehicles (excludes Rental & Government Customers) at Participating Isuzu UTE Dealers only. For 24MY and later vehicle models, the Flat Price Servicing covers the first 5 Scheduled Services up to 5 years/75,000km (whichever occurs first). FPS Program is subject to change. For full terms & conditions, current pricing & model eligibility visit isuzuute.com.au/flat-price-service-disclaimer.

[^]6 years/150,000km (whichever occurs first), for Isuzu UTE Vehicles with a Warranty Start Date on or after 1/1/19. Excludes trays & accessories.

[<]The Roadside Assistance Program (“RSA Program”) provides Coverage to RSA Eligible Vehicles (Private, ABN and Business Fleet Customers only) with a Warranty Start Date on or after 1/9/20 for a maximum of 7 years (unlimited kilometres). Initial 13 months Coverage provided from the Warranty Start Date. The Coverage will be reset for another 13 months from each date that a Participating Isuzu UTE Dealer conducts a Scheduled Service on the vehicle. For full terms & conditions visit isuzuute.com.au/roadside-assistance-disclaimer.

Safety

IDAS [#]	Every D-MAX comes with Isuzu’s Intelligent Driver Assistance System (IDAS) built-in to protect and enhance the driving experience. IDAS includes smart technologies as well as other passive and active safety features.
ANCAP RATING	The D-MAX has achieved a maximum 5-star ANCAP safety rating in 2022. The D-MAX BLADE variant is unrated.

Specifications and features may change without notice. Please consult your authorised Isuzu UTE Dealer for current availability of models, options, specifications, colours & Isuzu UTE Genuine Accessories. Isuzu UTE Australia makes no representations, warranties or endorsements regarding the accuracy of this brochure.

SPECIFICATIONS

Engine	4x2 High-Ride					4x4									
2164cc DOHC 4cyl. with intercooled turbo charger (400Nm, 120kW)	●		●	●				●	●	●					
2999cc DOHC 4cyl. with intercooled turbo charger (450Nm, 140kW)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Idle Stop-Start System (ISS)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Transmissions															
6-speed automatic transmission with sequential sport mode	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
8-speed automatic transmission with sequential sport mode	●		●	●				●	●	●			●		
Safety and Security															
4-channel 4-sensor Anti-lock Brake System (ABS) with Electronic Brakeforce Distribution (EBD)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Electronic Stability Control (ESC)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Traction Control System (TCS)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Emergency Brake Assist (EBA)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Hill Start Assist (HSA)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Hill Descent Control (HDC)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Autonomous Emergency Braking (AEB)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Turn Assist with AEB	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Post-Collision Braking	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Forward Collision Warning (FCW)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Misacceleration Mitigation	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Intelligent Adaptive Cruise Control (IACC) with Stop and Go functionality	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Traffic Jam Drive Assist	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Traffic Sign Recognition (TSR)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Intelligent Speed Limiter	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Manual Speed Limiter	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Lane Departure Warning (LDW)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Lane Departure Prevention (LDP)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Lane Keep Assist (LKA)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Emergency Lane Keeping (ELK)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Lane Support System (LSS) Switch (disables LDW, LDP, LKA, ELK)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Driver Attention Assist	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Blind Spot Monitoring (BSM)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Rear Cross Traffic Alert (RCTA)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Rear Cross Traffic Braking (RCTB)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
BSM/RCTA/RCTB Auto Switch Off (disables BSM/RCTA/RCTB when the genuine tow harness is connected)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Digital Reversing camera w/ Dynamic Guidelines					●					●			●	●	
Digital Reversing camera	●	●	●	●		●	●	●	●		●		●		
Rear Park Assist Sensors										●		●		●	
Front Park Assist Sensors														●	
8 Airbags: dual front, curtain, side, driver's knee and far side airbags	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Passenger side SRS airbag on/off switch	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Height-adjustable upper mounts for front seat belts	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Pre-tensioners with load limiters for front seat belts	●	●				●	●	●	●	●	●	●	●	●	
Pre-tensioners with load limiters for outer rear seat belts				●	●	●	●	●	●	●	●	●	●	●	
3-point retractable seat belts for all rear and centre seating positions				●	●	●	●	●	●	●	●	●	●	●	
Intelligent seatbelt reminder (all seats)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
2 childseat tethers and ISO FIX compatible anchor points				●	●	●	●	●	●	●	●	●	●	●	
Height-adjustable head restraints for full-size seats		●	●	●	●	●		●	●	●	●	●	●	●	
Integrated head restraint on front seats	●					●									
Child-proof rear door locks				●	●	●		●	●	●	●	●	●	●	
Single 10 inch servo brake master cylinder	●	●			●	●	●	●	●	●	●	●	●	●	
Side anti-intrusion bars inside all doors	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Engine immobilizer	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Rear window demister		●		●	●	●		●	●	●	●	●	●	●	
High Density Polyethylene (HDPE) fuel tank	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
High mount brake light on cabin	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Dual horn	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Protection															
Under-front steel skid plate	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Steel plate guards: sump, transfer case, fuel tank leading edge; reinforced resin under fuel tank						●	●	●	●	●	●	●	●	●	
Suspension and Brakes															
Standard rear leaf suspension				●	●				●	●		●	●	●	
Heavy duty rear leaf suspension	●	●	●			●	●	●			●				
Front independent, coil spring suspension w/gas shock absorbers, upper and lower wishbones and stabiliser bar	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Heavy-duty brakes: 320mm ventilated front discs w/twin-pot calipers, 295mm rear drums	●	●	●	●	●	●	●	●	●	●	●	●	●	●	

Specifications and features may change without notice. Please consult your authorised Isuzu UTE Dealer for current availability of models, options, specifications, colours & Isuzu UTE Genuine Accessories.
Isuzu UTE Australia makes no representations, warranties, or endorsements regarding the accuracy of this brochure.

SPECIFICATIONS

In-cabin Storage

Lower glovebox compartment only	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Upper and lower glovebox compartments					●				●	●	●	●	●	●
Power outlet in lower instrument panel	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Centre floor console	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Dual-purpose driver and front passenger cup holder tray	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Rear passenger door cup holders			●	●	●			●	●	●	●	●	●	●
Pockets on backs of front seats					●				●	●	●	●	●	●
Overhead console with twin map lights and flip-down sunglasses case	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Front door storage compartment with bottle bulge	●	●	●	●	●	●	●	●	●	●	●	●	●	●
2 coat hooks			●	●	●			●	●	●	●	●	●	●
Flip up convenience hook behind passenger front seat					●				●	●	●	●	●	●
Tool storage behind rear seats			●	●	●			●	●	●	●	●	●	●
Tool storage behind front seats	●	●				●	●							

Rear Tub

Double-walled ute tub				•	•				•	•		•	•	•
4 cargo tie-down hooks inside ute tub				•	•				•	•		•	•	•
Under rail tub liner					•							•	•	•
2 cargo tie-down hooks inside ute tub												•	•	•
Tailgate Assist				•	•				•	•		•	•	•

Exterior Style

Short front overhang for optimal manoeuvrability and approach angle	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Halogen multi-reflector projector lens headlights for extra low beam depth & reduced flare & integrated turn indicators	•	•	•	•		•	•	•	•					
Bi-LED headlights with auto-levelling function and integrated turn indicators					•					•	•	•	•	•
Automatic headlights	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Automatic high beam	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Coming home light	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Headlight Welcome light	•	•	•	•		•	•	•	•	•	•	•	•	•
LED Daytime Running Lights (DRLs)					•					•	•	•	•	•
LED fog lights					•					•	•	•	•	•
Material Black radiator grille	•	•	•	•		•	•	•	•	•				
Chrome radiator grille					•						•	•	•	
Dark Grey radiator grille														•
Colour-coded front bumper	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Colour-coded integrated rear step bumper				•	•				•		•	•	•	•
Black integrated rear step bumper										•				
Black rear bumper	•	•	•			•	•	•						
Factory fitted tow bar receiver					•						•	•	•	•
Space cab rear "wing" doors		•					•							
Aluminium side steps					•						•	•	•	
Dark Grey side steps										•				•
Black door and tailgate handles	•	•	•	•		•	•	•	•					
Chrome door and tailgate handles					•						•	•	•	
Dark Grey door and tailgate handles														•
Basalt Black door and tailgate handles										•				
Lockable tailgate				•	•				•	•		•	•	•
Dark Grey Aero Sports Bar														•
Black Sports Bar										•				
Matte Black roller tonneau														•
Soft tonneau cover										•				
Dark Grey front and rear underbody spoilers										•				•
Black front underbody spoiler										•				
Dark Grey fender flares														•
Dark Grey roof rails														•
Black power door mirrors	•	•	•	•		•	•	•	•					
Basalt Black power door mirrors with integrated turn indicators										•				
Chrome fold-in power door mirrors with integrated turn indicators					•						•	•	•	
Dark Grey fold-in power door mirrors with integrated turn indicators														•
Heated door mirrors					•						•	•	•	•
Centre front roof-mounted bee-sting aerial	•	•	•	•		•	•	•	•	•	•	•	•	•
LED rear combination lamps					•							•	•	•

Specifications and features may change without notice. Please consult your authorised Isuzu UTE Dealer for current availability of models, options, specifications, colours & Isuzu UTE Genuine Accessories.
Isuzu UTE Australia makes no representations, warranties or endorsements regarding the accuracy of this brochure.

SPECIFICATIONS

Seating

	Single Cab Chassis SX	Space Cab Chassis SX	Crew Cab Chassis SX	Crew Cab Ute SX	Crew Cab Ute LS-U	Single Cab Chassis SX	Space Cab Chassis SX	Crew Cab Chassis SX	Crew Cab Ute SX	Crew Cab Ute X-RIDER	Crew Cab Chassis LS-U	Crew Cab Ute LS-U	Crew Cab Ute LS-U+	Crew Cab Ute X-TERRAIN
Standard Black cloth seats	•	•	•	•		•	•	•	•		•	•		
High Grade cloth seats					•					•		•		
Leather Accented seats													•	
Leather Accented seats with Red Stitching														•
Front bucket whiplash protection seats	•	•	•	•	•	•	•	•	•	•	•	•	•	•
6-way adjustable driver seat	•	•	•	•	•	•	•	•	•	•	•	•	•	•
8-way electric adjustable driver seat														
Electric adjustable lumbar support (driver seat only)					•						•	•	•	•
Heated front seats													•	•
Split-fold rear seat			•	•				•	•				•	•
Split-fold rear seat with centre arm rest										•	•	•	•	•
Rear centre seat headrest			•	•	•			•	•	•	•	•	•	•

Cabin Amenities

	Single Cab Chassis SX	Space Cab Chassis SX	Crew Cab Chassis SX	Crew Cab Ute SX	Crew Cab Ute LS-U	Single Cab Chassis SX	Space Cab Chassis SX	Crew Cab Chassis SX	Crew Cab Ute SX	Crew Cab Ute X-RIDER	Crew Cab Chassis LS-U	Crew Cab Ute LS-U	Crew Cab Ute LS-U+	Crew Cab Ute X-TERRAIN
Dual zone climate control air-conditioning with integrated heater/demister					•						•	•	•	•
Manual air-conditioning with integrated heater/demister	•	•	•	•		•	•	•	•	•		•	•	•
Rear seat air-conditioning vents			•	•	•			•	•	•	•	•	•	•
Pollen and fine particle air filter	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Power windows with one-touch up/down driver's window with safety stop and delay closing	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Comfort turn signal	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Central locking with keyless entry	•	•	•	•		•	•	•	•	•	•	•	•	•
Smart keyless entry					•						•	•	•	•
Walk away lock					•						•	•	•	•
Remote key auto re-lock	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Push button start					•						•	•	•	•
Remote engine start														
4 speaker sound system	•	•	•	•		•	•	•	•					
6 speaker sound system										•				
*"Sky Sound" roof-mounted sound system with 8 speakers (mounted in front dash, front doors, rear doors and roof)					•						•	•	•	•
9 inch touchscreen display with wireless Apple CarPlay® and wireless Android Auto™* with MID Integration					•						•	•	•	•
8 inch touchscreen display with wireless Apple CarPlay® and wireless Android Auto™*	•	•	•	•		•	•	•	•	•				
Built-in satellite navigation with MID turn-by-turn directions					•						•	•	•	•
Rear centre console USB charging port			•	•	•			•	•	•	•	•	•	•
USB type C port in central instrument panel					•						•	•	•	•
USB type C port in Touchscreen	•	•	•	•		•	•	•	•	•				
USB type C port in rear floor console			•	•	•			•	•	•	•	•	•	•
USB type A port in Stereo Camera Housing	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Tilt and telescopic adjustable steering wheel with electric power steering	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Urethane steering wheel with cruise, audio and voice recognition controls	•	•	•	•		•	•	•	•	•				
Leather steering wheel with cruise, audio and voice recognition controls					•						•	•	•	•
4.2 inch Smart MID with digital speedometer, safety information, fuel economy and range, odometer, trip information and service reminder	•	•	•	•		•	•	•	•	•				
7 inch Smart MID with digital speedometer, safety information, fuel economy and range, odometer, trip information and service reminder					•						•	•	•	•
Tyre Pressure Monitoring System (TPMS)					•						•	•	•	•
Electro-luminescent gauges	•	•	•	•	•	•	•	•	•	•	•	•	•	•
*"Terrain Command" 4x4 select dial						•	•	•	•	•	•	•	•	•
Rear differential lock button						•	•	•	•	•	•	•	•	•
Rough Terrain Mode button						•	•	•	•	•	•	•	•	•
Automatic windshield wipers	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Intuitive flat wiper blade					•						•	•	•	•
Day/night interior rear view mirror	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Auto-dimming rear view mirror					•						•	•	•	•
Sun visors with vanity mirrors (driver and passenger) and ticket retaining strap (driver)					•						•	•	•	•
Sun visors with illuminated vanity mirrors (driver and passenger) and ticket retaining strap (driver)													•	•
Fixed A-pillar assist-grips for driver and front passenger	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Fixed B-pillar assist-grips for rear passengers			•	•	•			•	•	•	•	•	•	•
Folding assist-grips for driver and front passenger			•	•	•			•	•	•	•	•	•	•
Folding assist-grips for rear passengers			•	•	•			•	•	•	•	•	•	•
Carpet flooring					•						•	•	•	•
Easy-clean vinyl flooring	•	•	•	•		•	•	•	•	•				

*Apple CarPlay is a trademark of Apple Inc. Android Auto is a trademark of Google LLC. Not all devices will be compatible & functionality will vary depending on the device. Mobile Data & SMS rates may apply & are the responsibility of the user. Please check your local road rules before using these functions.

Specifications and features may change without notice. Please consult your authorised Isuzu UTE Dealer for current availability of models, options, specifications, colours & Isuzu UTE Genuine Accessories. Isuzu UTE Australia makes no representations, warranties, or endorsements regarding the accuracy of this brochure.

FUEL, WEIGHTS & DIMENSIONS

D-MAX ADR 81/02⁴ Fuel Consumption Values

Transmission (AT = Automatic)
FUEL CONSUMPTION (litres/100km)
Combined

Dimensions (mm unless stated otherwise)

Wheelbase	3125	3125	3125	3125	3125
Overall length	5340	5300	5300	5280	5285
Overall width (excluding door mirrors)	1870	1870	1870	1870	1870
Overall height (*depends on body fitted)	1790*	1800*	1800*	1785	1790
Front overhang	905	905	905	905	905
Rear overhang (*depends on body fitted)	1310*	1270*	1270*	1250	1255
Wheel track width	1570	1570	1570	1570	1570
Ground clearance	235	235	235	235	240
Turning circle diameter between kerbs (metres)	12.5	12.5	12.5	12.5	12.5
Approach angle	29.6°	29.6°	29.6°	30°	30.5°
Departure angle	24.6°	25.3°	25.3°	23.9°	19.0°
Ramp-over angle	23.9°	23.9°	23.9°	23.3°	23.8°

Load area (mm)

Cab to rear axle	1240	765	450	450	450
Length (top)	-	-	-	1495	1495
Length (floor) (*inside genuine accessory tray body)	2550*	2100*	1800*	1570	1570
Maximum width (*inside genuine accessory alloy tray body)	1777*	1777*	1777*	1530	1530
Width between wheel houses	-	-	-	1122	1122
Depth	-	-	-	490	490

Interior (mm)

Leg room - front	1075	1075	1075	1075	1075
Leg room - rear	-	-	905	905	905
Shoulder room - front	1460	1460	1460	1460	1460
Head room - front	1020	1020	1020	1020	1020
Rear cargo space	-	730	-	-	-

Mass (kg)

Gross Vehicle Mass (GVM)	3000	3000	3000	3000	3000
Kerb weight ⁴	1650	1700	1775	1775	1825
Payload ⁻ (cab chassis models: final mass depends on body fitted)	1350	1300	1225	1225	1175
Gross Combination Mass (GCM)	5850	5850	5850	5850	5850
Maximum towing mass (braked trailer)	3500	3500	3500	3500	3500
Maximum towing mass (non-braked trailer)	750	750	750	750	750
Maximum tow ball download (when fitted with genuine Isuzu UTE tow kit)	350	350	350	350	350
Fuel tank capacity (litres)	76	76	76	76	76

4x2 High-Ride									
Single Cab Chassis SX	Space Cab Chassis SX		Crew Cab Chassis SX	Crew Cab Ute SX		Crew Cab Ute LS-U			
	2.2L	3.0L		2.2L	3.0L	2.2L	3.0L		
AT	AT		AT	AT	AT	AT	AT		
6.9	7.8		7.8	6.9	7.8	6.3	7.1		

4x4													
Single Cab Chassis SX	Space Cab Chassis SX	Crew Cab Chassis SX		Crew Cab Ute SX		Crew Cab Ute X-RIDER		Crew Cab Chassis LS-U	Crew Cab Ute LS-U	Crew Cab Ute LS-U+	Crew Cab Ute X-TERRAIN		
		2.2L	3.0L	2.2L	3.0L	2.2L	3.0L						
AT	AT	AT	AT	AT	AT	AT	AT	AT	AT	AT	AT	AT	AT
7.8	7.8	7.1	7.8	6.6	7.1	7.1	7.8	7.8	7.1	7.1		7.8	

3125	3125	3125	3125	3125	3125	3125	3125	3125	3125	3125	3125	3125	3125
5340	5300	5300	5280	5305	5300	5285	5285	5310	1870	1870	1870	1870	1880
1790*	1800*	1800*	1785	1785	1805*	1790	1790	1810	905	905	905	905	930
1310*	1270*	1270*	1250	1250	1270*	1255	1255	1255	1570	1570	1570	1570	1570
235	235	235	235	235	240	240	240	240	12.5	12.5	12.5	12.5	12.5
29.6°	29.6°	29.6°	30°	26.9°	30°	30.5°	30.5°	27.3°	24.6°	25.3°	25.3°	23.9°	19.0°
23.9°	23.9°	23.9°	23.3°	23.3°	24.3°	23.8°	23.8°	23.8°	23.9°	23.9°	20.6°	19.0°	19.0°

1240	765	450	450	450	450	450	450	450	1570	1570	1570	1570	1570
-	-	-	1495	1495	-	1495	1495	1495	1530	1530	1530	1530	1530
2550*	2100*	1800*	1570	1570	1800*	1570	1570	1570	1122	1122	1122	1122	1122
1777*	1777*	1777*	1530	1530	1777*	1530	1530	1530	490	490	-	490	490
-	-	-	490	490	-	-	-	-	-	-	-	-	-

1075	1075	1075	1075	1075	1075	1075	1075	1075	1075	1075	1075	1075	1075
-	-	905	905	905	905	905	905	905	1460	1460	1460	1460	1460
1460	1460	1460	1460	1460	1460	1460	1460	1460	1020	1020	1020	1020	1020
1020	1020	1020	1020	1020	1020	1020	1020	1020	730	-	-	-	-

3100	3100	3100	3100	3100	3100	3100	3100	3100	3100	3100	3100	3100	3100
1790	1860	1860	1915	1980	2035	2010	2060	1960	2100	2105	2170	2170	2170
1310	1240	1240	1185	1120	1065	1090	1040	1140	1000	995	930	930	930
6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000
3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500
750	750	750	750	750	750	750	750	750	750	750	750	750	750
350	350	350	350	350	350	350	350	350	350	350	350	350	350
76	76	76	76	76	76	76	76	76	76	76	76	76	76

⁴Fuel consumption & emissions figures based on ADR 81/02 & are to be used for vehicle comparison purposes only. Actual fuel consumption & emissions will vary depending on many factors including, but not limited to, traffic conditions, individual driving style & vehicle condition. ⁴ Kerb weight - unladen mass of vehicle & full tank of fuel, excludes tray body for cab chassis vehicles. Fuel weight ratio is based on Fuel Standard (Automotive Diesel) Determination 2001.

⁻Payload equals GVM minus kerb weight.

Specifications and features may change without notice. Please consult your authorised Isuzu UTE Dealer for current availability of models, options, specifications, colours & Isuzu UTE Genuine Accessories. Isuzu UTE Australia makes no representations, warranties or endorsements regarding the accuracy of this brochure.

CAB CHASSIS BODY STYLES AND DIMENSIONS (25.5MY)



SX Single Cab Chassis 4x2 & 4x4



















SX Space Cab Chassis 4x2 & 4x4



SX Crew Cab Chassis 4x2 & 4x4



LS-U Crew Cab Chassis 4x4

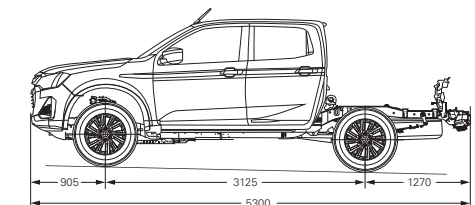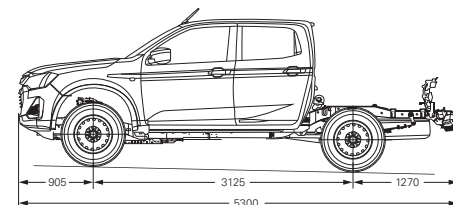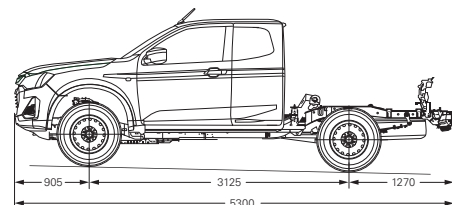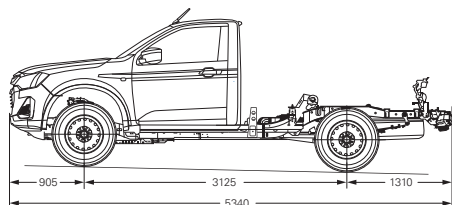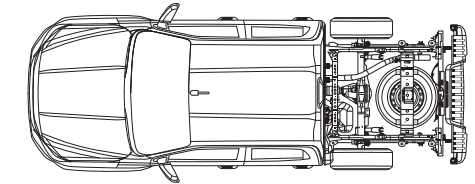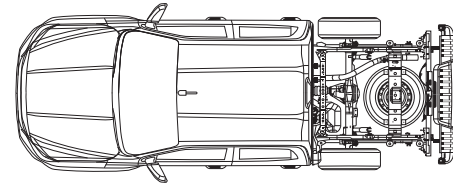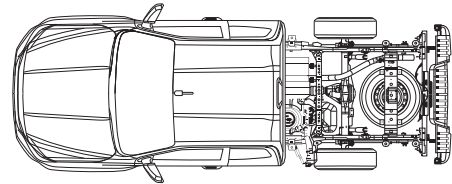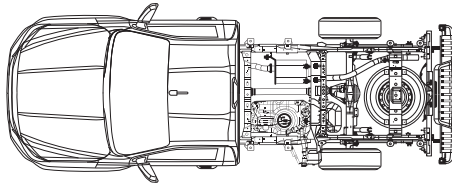

UTE BODY STYLES AND DIMENSIONS (25.5MY)



SX Crew Cab Ute 4x2 & 4x4



X-RIDER Crew Cab Ute 4x4



**LS-U Crew Cab Ute 4x2 & 4x4
LS-U+ Crew Cab Ute 4x4**



X-TERRAIN Crew Cab Ute 4x4

